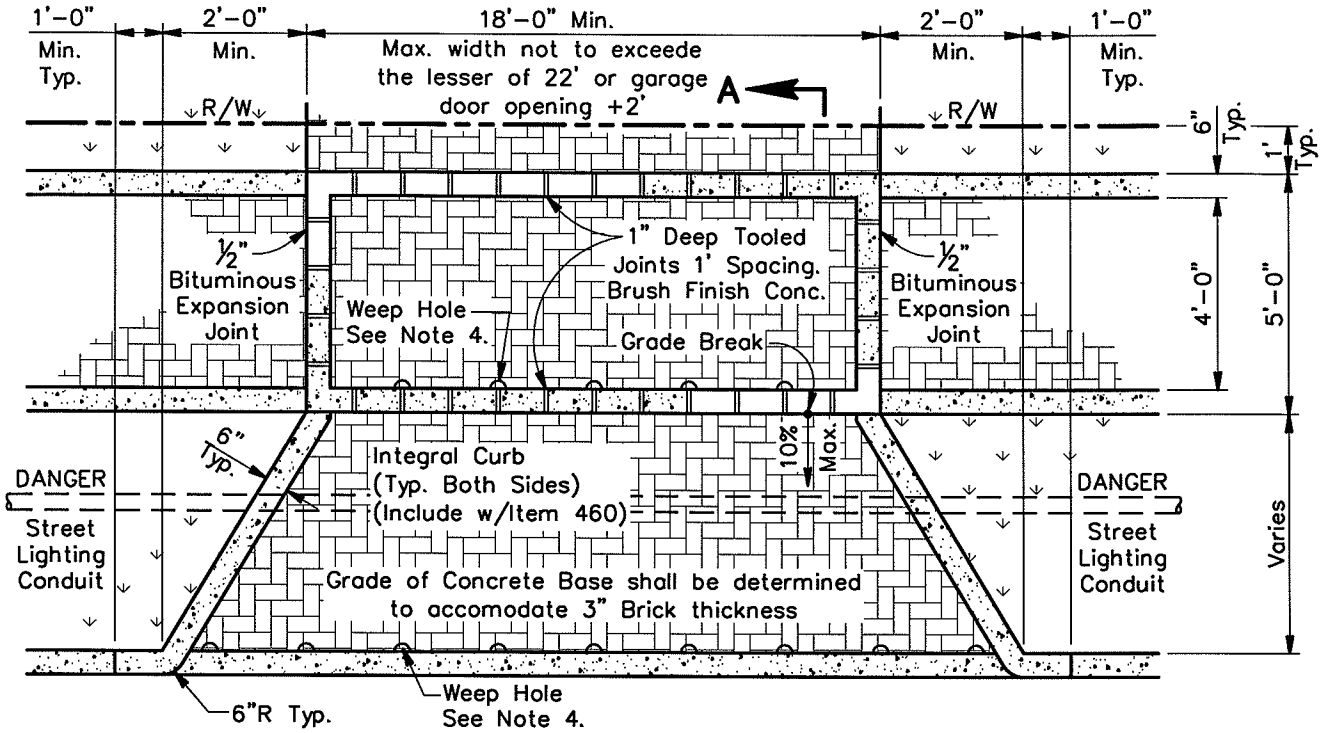

PLAN VIEW

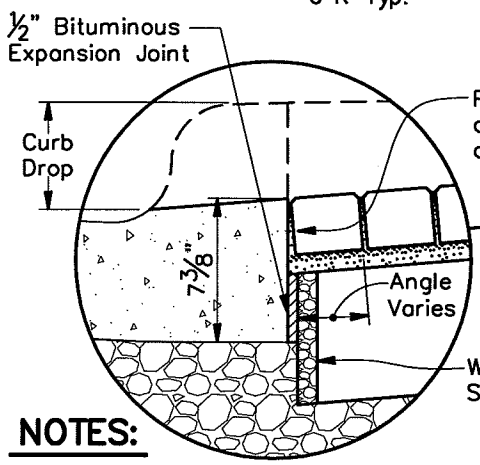

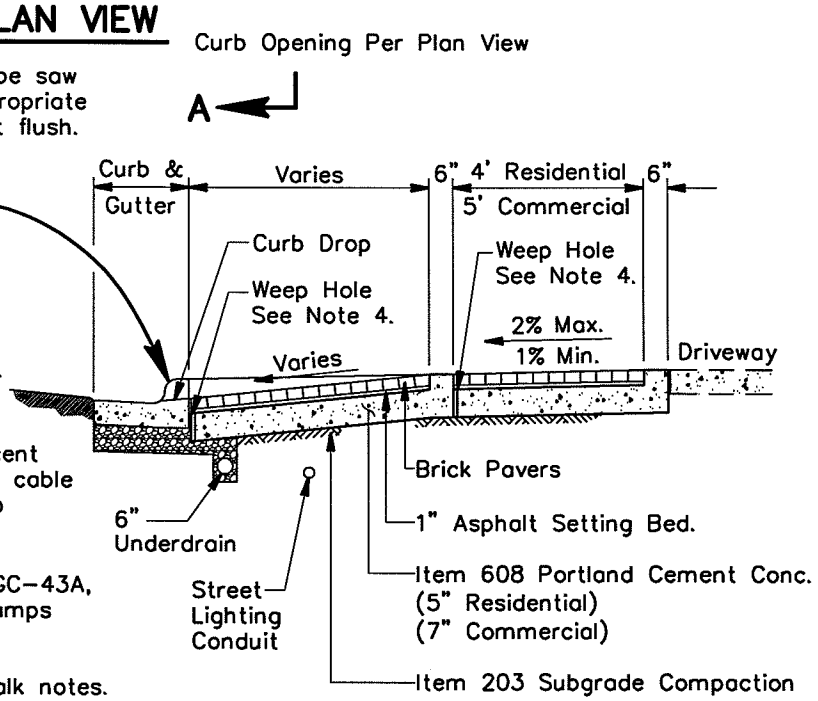

SECTION A–A

NOTES:

1. Contractor is responsible for protecting adjacent driveway, sidewalk, underdrain, and street lighting cable and replacement of the same if damaged due to Contractor's work.

2. See Sidewalk Detail Curb Ramp Drawings C–GC–43A, B & C for Curb Ramp Specifications. All Curb Ramps shall be Concrete.

3. See Std. Dwg. No. C–GC–94 for Brick Sidewalk notes.

4. 1" R Weep Holes Formed in Concrete Base 24" C.C. filled with Washed #8 Aggregate.

5. Portland Cement Concrete Edging required for driveway approach.

	RESIDENTIAL BRICK DRIVEWAY APPROACH	CITY OF GROVE CITY, OHIO		
		STANDARD CONSTRUCTION DRAWING		
		Effective Date 8–22–06	Revision Date –	Drawing Number C–GC–93